




**"FIVE AND SIX SPEED CONVERSION SPECIALISTS"**

## MD-910-1007 Ford T-45 External Slave Cylinder Installation Instructions

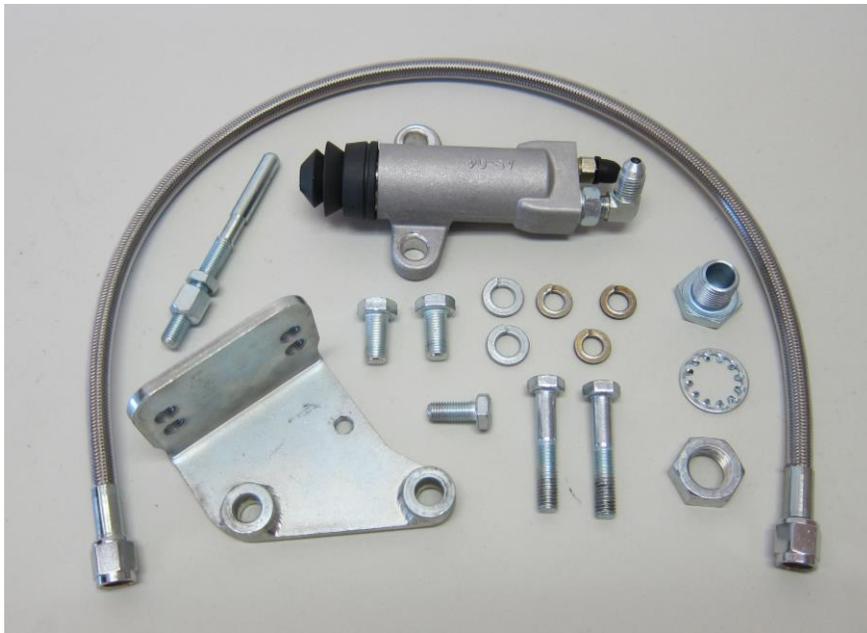

### **Read These Instructions Completely Before Beginning**

These instructions are for an external hydraulic slave cylinder installation for a T-45 which uses a pull/cable 94-04 SN95 clutch fork

#### **1.0 Tools and Notes**

1.1 Drill motor, 21/64" drill bit, 13mm, 1/2", 9/16" & 15/16" wrenches and/or socket/ratchet

1.2 Safety Equipment – Always wear ANSI approved safety goggles/glasses when working with metal and fluids. Wear proper gloves when working with hot surfaces and corrosive fluids.

1.3 The Slave cylinder mounts aft of the clutch fork, pushing the clutch for forward. You do not need to change your clutch fork.

1.4 Our mock-up bell housing and transmission have certain items removed for clarity.


## 2.0 Disassembly

2.1 This step applies to a vehicle with an existing cable style installation. If your vehicle already has a hydraulic system (master cylinder) this step does not apply. Remove cable, cable brackets and any retaining clips, springs and clamps, none of those components will be re-used. Remove the clutch lever cover and retain for possible re-use.


## 3.0 Installation

3.1 Always wear ANSI approved safety goggles/glasses when working with metal. There is an existing hole with threads in the bell housing, matching up to the threaded hole in the supplied slave cylinder bracket. Mark the location of the third hole. Remove bracket and drill 21/64" hole. Reinstall bracket and all hardware.

3.2 Install bracket on bell housing with (3) bolts and lock washers.

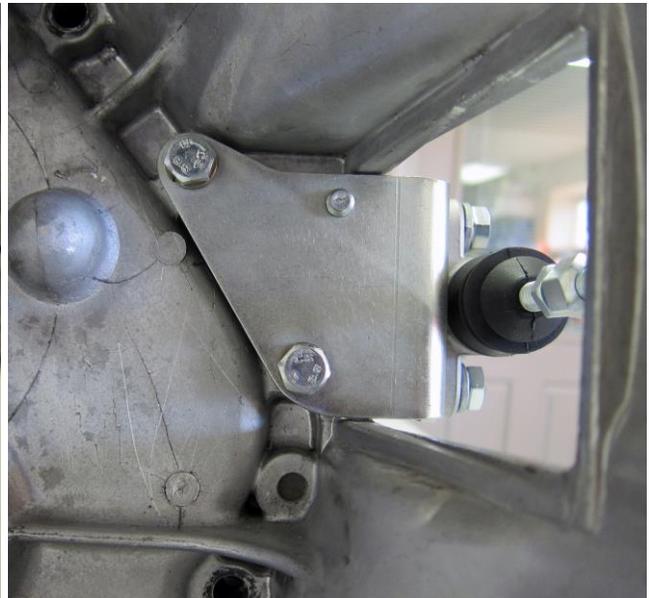

- 3.3 Install the socket on the aft side of the clutch fork in the inner hole and install the nut and lock washer on the front side and tighten using a 15/16" socket/wrench.
- 3.4 Install the push rod into the slave cylinder and install the slave cylinder using **the two rear bolt holes** on the mounting bracket and tighten 3/8" bolts and lock washers.

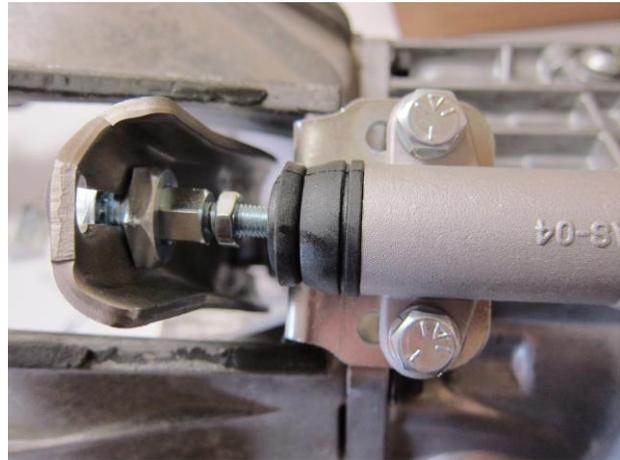

- 3.5 Set-Up: Open the bleed port. **Push the piston completely to the bottom of the piston bore AND make sure the throw-out bearing is in contact with the clutch pressure plate.** Adjust the convex nut on push rod to take out any slack/gap between the convex nut and socket (zero lash) then tighten the jam nut against the convex nut. **Caution: Do not leave a gap between the throw-out bearing and the clutch diaphragm** – that is old-school. Throw-out bearings designed today are made to have contact (not pressure) full-time. Leaving a gap will result in slave cylinder failure and the piston will pop out.
- 3.6 Attach steel braided line to the slave cylinder fitting and master cylinder fitting. Tighten hose end fittings. Make sure the steel braided line does not interfere with any moving parts and is at least 2" away from the exhaust. Rotate the 90-degree fittings on the master cylinder and slave cylinder as required to accomplish required clearances and tighten jam nuts on both master cylinder and slave cylinder.
- 3.7 The clutch lever cover will no longer be used.
- 3.8 Modern Driveline offers a hydraulic clutch system "bleeder kit". The bleeder kit comes standard in all Modern Driveline master cylinder kits, and is also available separately as a purchase item. The one-person bleeder kit is made **ONLY** for reservoirs with a round opening measuring between 1.30" & 1.55" in diameter. DOT 3 brake fluid only.
- 3.9 Important: Once your new hydraulic system is active, **the rod coming out of the slave cylinder should travel 1.2"**. Less than 1.2" may result in a clutch that does not release properly. The slave cylinder push rod should move immediately when the pedal is pressed.

Lack of immediate movement or a spongy feeling clutch pedal indicates air is still in the system.

- 3.10 Periodic adjustment is required for this system. In the initial set-up above, the convex nut was adjusted for zero lash. When the clutch starts to release higher than it used to, repeat the process outlined in the set-up step above to obtain zero lash. This periodic adjustment will extend clutch life and throw-out bearing life by eliminating preload and premature wear. Once again, make sure the piston is bottomed out in the bore and the throw-out bearing is contacting the pressure plate when making any adjustments.
- 3.11 Further assistance and tech support is available by calling Modern Driveline at 208-453-9800 M-F 8-5 Mountain time. Email – [Tech@ModernDriveline.com](mailto:Tech@ModernDriveline.com) . Please contact us first for any issues.
- 3.12 Enjoy your new hydraulic system and Thank You for choosing Modern Driveline. We appreciate your business.